


## PP Conduit

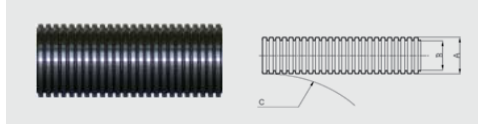


Material: Polypropylene  
 Temperature range: -20°C~+90°C  
 Properties: Acid resisting, halogen free, high fatigue life, high flexibility

Colour: Black(BL)/Grey(GR)/Orange(OR)  
 Protection Degree: IP68(For use with RL fitting & seal)  
 Applications: Acid resisting environments

Conduit size	Part no.	A ( mm ) OD	B ( mm ) ID	C ( mm ) Min bend radius	Packing (m/roll)
10	PP-10	10.0	6.5	15	200
13	PP-13	13.0	10.0	20	100
16	PP-16	15.8	12.0	30	100
21	PP-21	21.2	16.8	40	100
28	PP-28	28.5	22.0	50	100
34	PP-34	34.5	28.0	60	50
42	PP-42	42.5	36.0	80	25
54	PP-54	54.5	46.5	100	25

## PP Frconduit

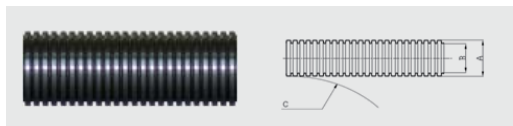

Material: Polypropylene  
 Temperature range: -20°C~+90°C  
 Properties: Acid resisting, halogen free, high fatigue life, high flexibility

Colour: Black(BL)/Grey(GR)/Orange(OR)  
 Protection Degree: IP68(For use with RL fitting & seal)  
 Applications: Acid resisting environments

Conduit size	Part no.	A ( mm ) OD	B ( mm ) ID	C ( mm ) Min bend radius	Packing (m/roll)
10	PP-V0-10	10.0	6.5	15	200
13	PP-V0-13	13.0	10.0	20	100
16	PP-V0-16	15.8	12.0	30	100
21	PP-V0-21	21.2	16.8	40	100
28	PP-V0-28	28.5	22.0	50	100
34	PP-V0-34	34.5	28.0	60	50
42	PP-V0-42	42.5	36.0	80	25
54	PP-V0-54	54.5	46.5	100	25