


## SPUL Liquid-tight metal conduits

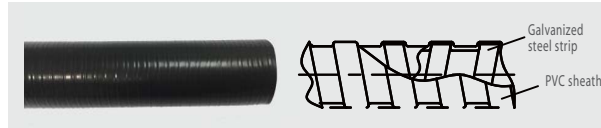

Material: Galvanized steel strip( square locked & inter locked ), PVC sheath

Temperature range: -40°C~+80°C,short-term to 100°C

Protection Degree: IP68

Properties: Offer superior tensile resistant, vandalism resistant, high fatigue life, wide temperature tolerances, corrosion resistant and excellent water proof etc.

Colour: Black/Grey

Flame-retardant: UL94-V0

Applications: Railway, vehicle, traffic system project air-condition. Various machine tool and machines. Automatic control equipment, electric power plants. Petroleum, chemical industry, transmission and distribution system, communication system, base station span. Cable protection in ships, buildings and plants.

### Square locked

Conduit size	Part no.	OD ( mm )		ID ( mm )		Packing (m/roll)
		Min	Max	Min	Max	
3/8"	SPUL-16	17.50	18.00	12.29	12.80	50
1/2"	SPUL-20	20.80	21.30	15.80	16.31	50
3/4"	SPUL-25	25.20	26.70	20.83	21.34	50
1"	SPUL-32	32.80	33.40	26.44	27.08	30
1 1/4"	SPUL-40	41.40	42.20	35.05	35.81	30

### Inter locked

Conduit size	Part no.	OD ( mm )		ID ( mm )		Packing (m/roll)
		Min	Max	Min	Max	
1 1/2"	SPUL-45	47.40	48.30	40.01	40.64	20
2"	SPUL-57	59.40	60.30	51.31	51.94	10
2 1/2"	SPUL-70	72.10	73.00	62.99	63.63	10
3"	SPUL-85	87.90	88.90	77.98	78.74	5
4"	SPUL-110	113.3	114.3	101.6	102.6	5

Other technical data on request.