

45° Zinc alloy Elbow fitting


Material: Zinc alloy with zinc, chromium plated

Temperature range: -40°C ~ +120°C , short-term to 150°C

Protection Degree: IP65

Fitting conduits: SC, SPC, SPLC, SBC, SSC, SPUL, RPC, SSPC

Properties: Thickened in zinc alloy with zinc or hard chromium, perfect appearance, compact structure and high strength. Masterly design of sheath and button up, matching tight equipment that bring timesaving, advantage and high stretching resistance. Waterproof, dustproof, resistance to salt, acid base, alcohol, oils, fats and other ordinary dissolvent.

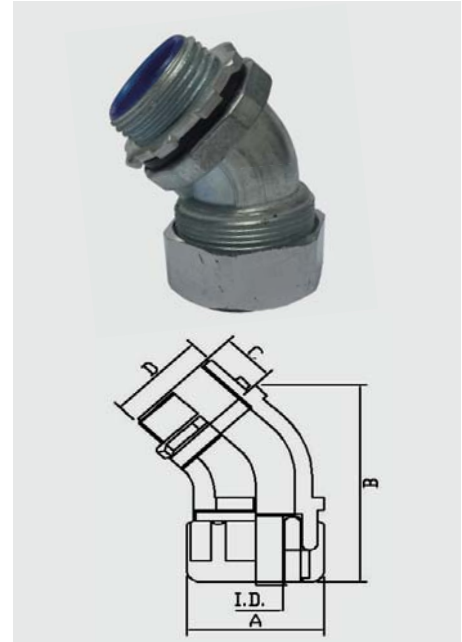

METRIC THREAD

Fits to conduit size	Part no.	Thread	I.D.	A	B	C	D	Packing (pcs)
5/16"	SPC12-M16-A45	M16X1.5	8.5	21.0	55.0	13.0	16.0	50
3/8"	SPC16-M20-A45	M20X1.5	11.2	27.6	57.0	15.0	20.0	50
1/2"	SPC20-M20-A45	M20X1.5	14.8	34.5	57.5	15.0	20.0	50
1/2"	SPC20-M24-A45	M24X1.5	14.8	34.5	57.5	15.0	24.0	50
3/4"	SPC25-M27-A45	M27X2.0	18.7	41.5	62.0	17.3	27.0	50
3/4"	SPC25-M30-A45	M30X2.0	18.7	41.5	62.0	17.3	30.0	50
1"	SPC32-M33-A45	M33X2.0	24.8	47.5	64.0	20.5	33.0	50
1"	SPC32-M36-A45	M36X2.0	24.8	47.5	64.0	20.5	36.0	50
1 1/4"	SPC40-M42-A45	M42X2.0	33.1	57.0	92.7	20.7	42.0	25
1 1/4"	SPC40-M48-A45	M48X2.0	33.1	57.0	92.7	20.7	48.0	25
1 1/2"	SPC45-M48-A45	M48X2.0	38.0	70.5	98.0	24.5	48.0	20
1 1/2"	SPC45-M60-A45	M60X2.0	38.0	70.5	98.0	24.5	60.0	20
2"	SPC57-M60-A45	M60X2.0	48.8	85.0	160.0	25.0	60.0	10
2"	SPC57-M72-A45	M72X2.0	48.8	85.0	160.0	25.0	72.0	10

PF THREAD

Fits to conduit size	Part no.	Thread	I.D.	A	B	C	D	Packing (pcs)
5/16"	SPC12-PF3/8" -A45	PF3/8"	8.5	21.0	55.0	13.0	16.6	50
3/8"	SPC16-PF1/2" -A45	PF1/2"	11.2	27.6	57.0	15.0	20.9	50
1/2"	SPC20-PF1/2" -A45	PF1/2"	14.6	30.0	48.0	11.5	20.4	50
3/4"	SPC25-PF3/4" -A45	PF3/4"	19.0	35.0	57.0	13.5	25.8	50
1"	SPC32-PF1" -A45	PF1"	24.5	41.5	70.0	15.0	33.5	50
1 1/4"	SPC40-PF1 1/4" -A45	PF1 1/4"	33.7	52.0	92.7	16.0	41.1	25
1 1/2"	SPC45-PF1 1/2" -A45	PF1 1/2"	37.7	59.0	86.0	17.0	47.0	20
2"	SPC57-PF2" -A45	PF2"	49.0	73.0	99.0	19.0	59.0	10
2 1/2"	SPC70-PF2 1/2" -A45	PF2 1/2"	61.5	89.0	112.0	23.0	74.3	5
3"	SPC85-PF3" -A45	PF3"	75.8	122.0	182.6	26.0	87.8	2
4"	SPC110-PF4" -A45	PF4"	97.6	165.0	223.5	34.0	113.0	2