


65/66

Halogen free & Low smoke duct



H (mm)	W (mm)	WDLK Series(A-Bmm)			WDLX Series(A-Bmm)		Packing (m/box)
		Part no.	6-8	8-12	10-12	Part no.	
30	20				WDLX3020	•	100
	25				WDLX3025	•	100
	35				WDLX3035	•	100
35	35				WDLX3535	•	100
40	25	WDLK4025	•		WDLX4025	•	100
	40	WDLK4040	•		WDLX4040	•	80
	60	WDLK4060	•		WDLX4060	•	64
50	25	WDLK5025	•		WDLX5025	•	100
	35	WDLK5035	•		WDLX5035	•	100
	*45	WDLK5045	•		WDLX5045	•	80
	50	WDLK5050	•		WDLX5050	•	80
	60	WDLK5060	•		WDLX5060	•	64
60	80	WDLK5080	•		WDLX5080	•	48
	25	WDLK6025	•		WDLX6025	•	80
	40	WDLK6040	•		WDLX6040	•	64
	60	WDLK6060	•		WDLX6060	•	48
65	80	WDLK6080	•		WDLX6080	•	36
	33	WDLK6533	•		WDLX6533	•	80
	45	WDLK6545	•		WDLX6545	•	80
80	65	WDLK6565	•		WDLX6565	•	48
	25	WDLK8025		•	WDLX8025	•	60
	35	WDLK8035		•	WDLX8035	•	60
	40	WDLK8040		•	WDLX8040	•	48
	45	WDLK8045		•	WDLX8045	•	48
	50	WDLK8050		•	WDLX8050	•	48
	60	WDLK8060		•	WDLX8060	•	36
	80	WDLK8080		•	WDLX8080	•	36
100	100	WDLK80100		•	WDLX80100	•	24
	120	WDLK80120		•	WDLX80120	•	24
	35	WDLK10035		•	WDLX10035	•	48
	40	WDLK10040		•	WDLX10040	•	48
	50	WDLK10050		•	WDLX10050	•	48
	60	WDLK10060		•	WDLX10060	•	36
120	80	WDLK10080		•	WDLX10080	•	24
	100	WDLK100100		•	WDLX100100	•	24
	120	WDLK100120		•	WDLX100120	•	24

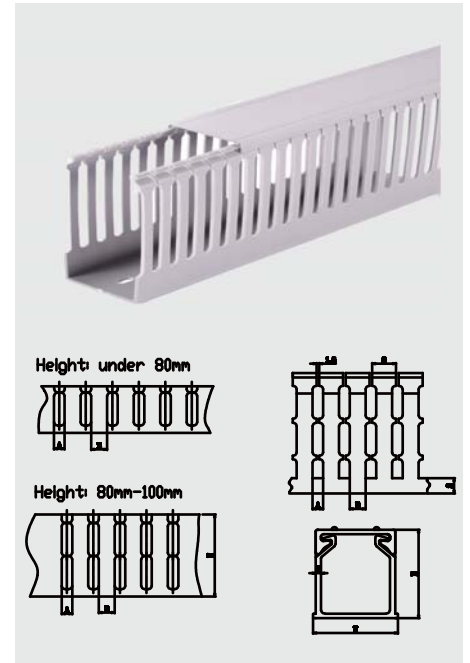

Material: PC+ABS, halogen free, low smoke, RoHS compliant. Insulating material, electrical safety, fire safety.

Colour: Grey

Temperature range: -40°C~+90°C
Flam-retardant: UL94-V0

Properties: Consist of base and cover, easy and firm snap-on assembly, smooth joining for a better finish. With aligned slot, smooth corners and edges will not damage or disfigure wires. All sides and versatile mounting holes, easy to install and disassembly. Special mark line design on the cover can allow a quick tag of relevant components.