


Non-slip duct



H (mm)	W (mm)	WDNK Series(A-Bmm)			WDNX Series(A-Bmm)		Packing (m/box)	
		Part no.	6-8	8-10	10-10	Part no.		4-6
	20					WDNX-3020	•	100
30	25					WDNX-3025	•	100
	35					WDNX-3035	•	100
	35					WDNX-3535	•	100
40	25	WDNK-4025	•			WDNX-4025	•	100
	40	WDNK-4040	•			WDNX-4040	•	80
	60	WDNK-4060	•			WDNX-4060	•	64
50	25	WDNK-5025	•			WDNX-5025	•	100
	35	WDNK-5035	•			WDNX-5035	•	100
	*45	WDNK-5045	•			WDNX-5045	•	80
	50	WDNK-5050	•			WDNX-5050	•	80
	60	WDNK-5060	•			WDNX-5060	•	64
60	80	WDNK-5080	•			WDNX-5080	•	48
	25	WDNK-6025	•			WDNX-6025	•	80
	40	WDNK-6040	•			WDNX-6040	•	64
	60	WDNK-6060	•			WDNX-6060	•	48
65	80	WDNK-6080	•			WDNX-6080	•	36
	33	WDNK-6533	•			WDNX-6533	•	80
	45	WDNK-6545	•			WDNX-6545	•	80
80	65	WDNK-6565	•			WDNX-6565	•	48
	25	WDNK-8025	•			WDNX-8025	•	60
	35	WDNK-8035	•			WDNX-8035	•	60
	40	WDNK-8040	•			WDNX-8040	•	48
	45	WDNK-8045	•			WDNX-8045	•	48
	50	WDNK-8050	•			WDNX-8050	•	48
	60	WDNK-8060	•			WDNX-8060	•	36
	80	WDNK-8080	•			WDNX-8080	•	36
	100	WDNK-80100	•			WDNX-80100	•	24
	120	WDNK-80120	•			WDNX-80120	•	24
100	35	WDNK-10035	•			WDNX-10035	•	48
	40	WDNK-10040	•			WDNX-10040	•	48
	50	WDNK-10050	•			WDNX-10050	•	48
	60	WDNK-10060	•			WDNX-10060	•	36
	80	WDNK-10080	•			WDNX-10080	•	24
	100	WDNK-100100	•			WDNX-100100	•	24
	120	WDNK-100120	•			WDNX-100120	•	24

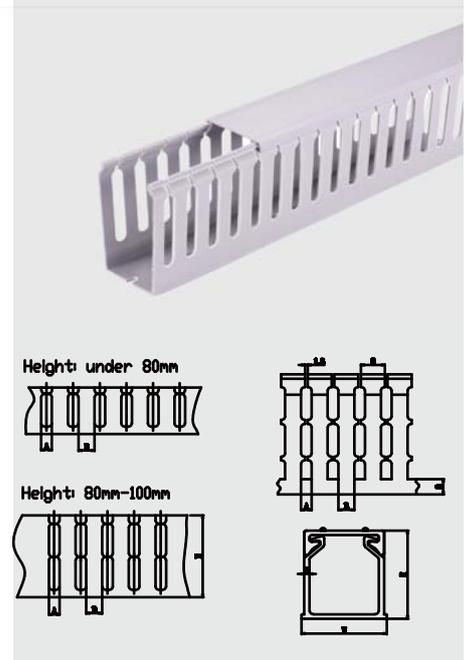

Material: Manufactured with High quality rigid PVC,RoHS compliant.

Colour: Grey(White, Blue and Black colors are available)

Temperature range: -20°C~+80°C

Flam-retardant: UL94-V0

Properties: The inner side of the cover plate of the co-extruded non-slip design, easy to install, does not fall off at any angle.Side of the tooth ateral teeth arranged in spaced, easy wiring harness longitudinal arrangement, neat appearance.Bottom hole to diversify the design, easy to install, square side hole, suitable for cable wiring, section appearance.