

Dual wall heat-shrink tube


Material: Polyethylene

Colour: Black/other colours

Temperature range: -45°C~+125°C

Shrinking ration: 3:1and4:1

Properties: SRS is made of the high quality polymer layer with hot melt adhesive (inner layer). When exposed to heat source, the inner layer begins to melt and flow. When it cools down, inner layer forms an adhesion layer between the tubing and the component or wire. This provides a water-tight seal and protection for the connectors or wire.

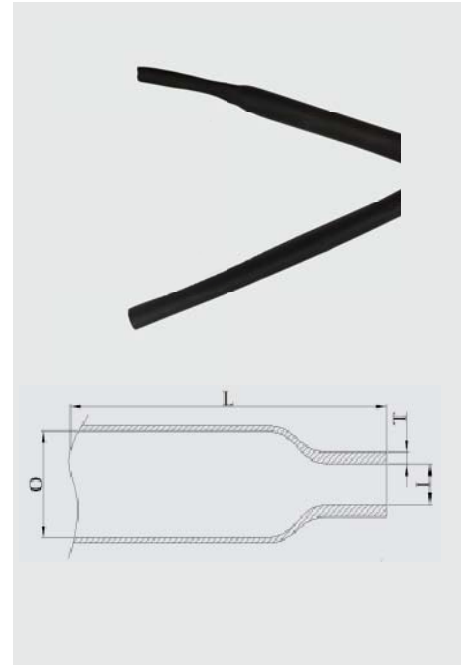

Part no.	Inside diameter O (mm)	Inside diameter I (mm)	After shrink		Packing (m/roll)
			Wall thickness T (mm)	Adhesive thickness (mm)	
3 : 1 Dual wall tube specification					
SRS-3.2	3.2	1.0	1.0	0.40	200
SRS-4.8	4.8	1.6	1.1	0.40	100
SRS-6.4	6.4	2.0	1.2	0.50	100
SRS-7.9	7.9	2.7	1.4	0.50	100
SRS-9.5	9.5	3.2	1.4	0.50	50
SRS-12.7	12.7	4.2	1.7	0.50	1.22
SRS-15.0	15.0	5.0	1.8	0.60	1.22
SRS-19.1	19.1	6.3	2.0	0.60	1.22
SRS-25.4	25.4	8.5	2.1	0.60	1.22
SRS-30	30.0	10.2	2.2	0.60	1.22
SRS-39	39.0	13.5	2.4	0.60	1.22
SRS-50	50.0	17.0	2.7	0.70	1.22
SRS-64	64.0	21.0	3.0	0.70	1.22
SRS-75	75.0	25.0	3.2	1.0	1.22
SRS-90	90.0	30.0	3.3	1.0	1.22
SRS-100	100.0	34.0	3.5	1.2	1.22
SRS-125	125.0	42.0	3.5	1.2	1.22
4:1 Dual wall tube specification					
SRS-4	4.0	1.0	1.0	0.4	200
SRS-6	6.0	1.5	1.1	0.4	100
SRS-8	8.0	2.0	1.5	0.5	50
SRS-12	12.0	3.0	1.7	0.5	1.22
SRS-16	16.0	4.0	2.0	0.6	1.22
SRS-20	20.0	5.0	2.3	0.6	1.22
SRS-24	24.0	6.0	2.5	0.6	1.22
SRS-32	32.0	8.0	2.8	0.7	1.22
SRS-52	52.0	13.0	3.0	0.4	1.22