

## Heat shrinkable braided sleeving


Material: Polyolefin+Polyester

Colour: Black

Start shrunk temperature: 80°C      Minimum fully recovery temperature: 120°C

Shrinking ration: 2:1

Properties: RBT consist of polyester multifilament and special modified polyolefin filament, it will shrink when expose to heat source, this unique woven construction makes it extremely flexible, easy to install on the hoses with irregular shapes. Suitable used in rough environments, providing excellent abrasion resistance and noise reduction.

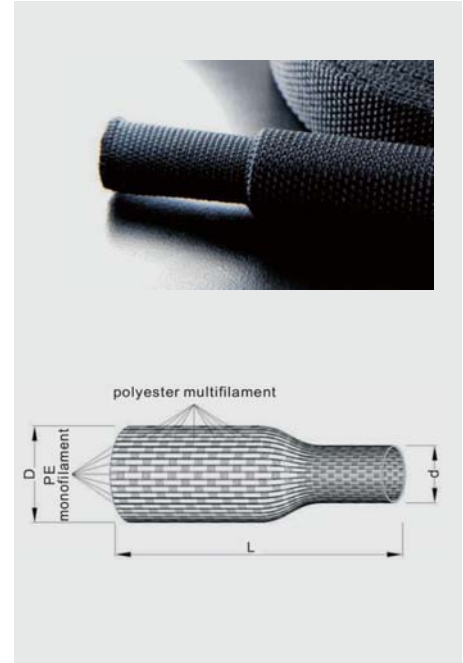

Part no.	Inside diameter Before shrink D (mm)	Inside diameter After shrink d (mm)	Packing (m/roll)
RBT-10	10.0	5.0	400
RBT-20	20.0	10.0	200
RBT-25	25.0	12.5	150
RBT-30	30.0	15.0	100
RBT-34	34.0	17.0	100
RBT-40	40.0	20.0	100
RBT-50	50.0	25.0	100
RBT-60	60.0	30.0	50
RBT-70	70.0	35.0	50
RBT-80	80.0	40.0	50