

Silicone fiberglass sleeving (outer glass fiber and inner silicone)

Material: outer glass fiber and inner silicone


Colour: White

Temperature range: -60°C~+200°C

Breakdown voltage: 7.0kV

Flammability: VW-1

Properties: NWB is coated by silicone with the process of thermal and vulcanization that possesses good properties of dielectric high temperature resistance and cold resistance. It also provides abrasion and flame resistance with high flexibility.

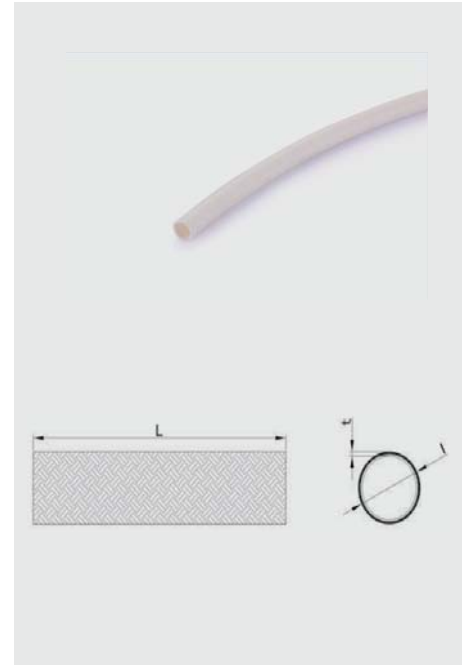

Part no.	I.D.(mm) inside diameter	(T) wall thickness	Packing (m/roll)
NWB-01	1	0.65	100
NWB-01.5	1.5	0.65	100
NWB-02	2	0.65	100
NWB-02.5	2.5	0.65	100
NWB-03	3	0.65	100
NWB-03.5	3.5	0.65	100
NWB-04	4	0.65	100
NWB-04.5	4.5	0.65	100
NWB-05	5	0.85	100
NWB-05.5	5.5	0.85	100
NWB-06	6	0.85	100
NWB-07	7	1.15	100
NWB-08	8	1.15	50
NWB-10	10	1.25	50
NWB-12	12	1.5	50