


PA Light Weight Conduit

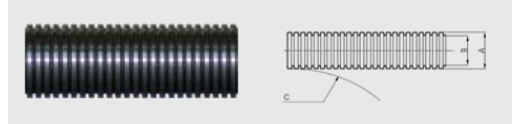

CE ULtest DB EN45545

Material: Polyamide 6

Temperature range: -40°C ~ +120°C , short-term to 150°C

Properties: High flexibility, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life, self-extinguishing


Colour: Black(BL)/Grey(GR)

Protection Degree: IP66, IP68(For use with RL fitting & seal)

Applications: Machine tool, mechanical building, auto equipment, electric control system, shipping facilities etc

Conduit size	Part no.	A (mm) OD	B (mm) ID	C (mm) Min bend radius	Packing (m/roll)
13	PAL-13	13.0	10.2	25	50
16	PAL-16	15.8	12.0	35	50
17	PAL-17	17.0	13.4	35	50
18	PAL-18	18.5	14.7	40	50
21	PAL-21	21.2	17.6	45	50
26	PAL-26	26.0	21.7	50	50
28	PAL-28/F	28.5	23.7	50	50
28	PAL-28/C	28.5	22.6	50	50
34	PAL-34/F	34.5	29.0	60	50
34	PAL-34/C	34.5	29.0	60	50
42	PAL-42	42.5	35.7	65	25
54	PAL-54	54.5	48.0	75	25

PA Light Weight Slit Conduit

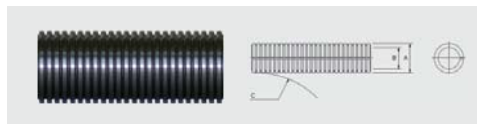

CE ULtest DB EN45545

Material: Polyamide 6

Temperature range: -40°C ~ +120°C , short-term to 150°C

Properties: High flexibility, high abrasion resistance, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life

Colour: Black(BL)/Grey(GR)

Applications: Machine tool, mechanical building, auto equipment, shipping facilities, transport installation, air-condition equipment, railway etc

Conduit size	Part no.	A (mm) OD	B (mm) ID	C (mm) Min bend radius	Packing (m/roll)
10	PAL-10-S	10.1	6.6	15	50
13	PAL-13-S	13.0	10.2	25	50
16	PAL-16-S	15.8	12.0	35	50
21	PAL-21-S	21.2	17.6	45	50
28	PAL-28/F-S	28.5	23.7	50	50
34	PAL-34/F-S	34.5	29.0	60	50
42	PAL-42-S	42.5	35.7	65	25
54	PAL-54-S	54.5	48.0	75	25