


PR Standard Weight Conduit

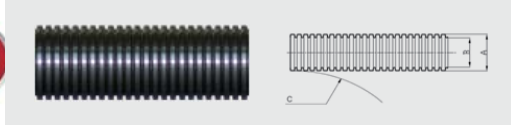


Material: Modified nylon
 Temperature range: -40°C ~ +120°C , short-term to 150°C
 Protection Degree: IP66, IP68(For use with RL fitting & seal)
 Properties: High flexibility, fire hazard, low smoke density, low toxicity, halogen free, high UV resistance and high fatigue life, self-extinguishing

Colour: Black(BL)
 Flame-retardant: UL94-V0
 Applications: Machine tool, mechanical building, auto equipment, shipping facilities, transport installation, air-condition equipment, rail transportation, railway etc

Conduit size	Part no.	A (mm) OD	B (mm) ID	C (mm) Min bend radius	Packing (m/roll)
10	PRS-10	10.0	6.5	15	50
13	PRS-13	13.0	10.1	25	50
16	PRS-16	15.8	11.9	35	50
17	PRS-17	17.0	13.3	35	50
18	PRS-18	18.5	14.6	40	50
21	PRS-21	21.2	17.5	45	50
26	PRS-26	26.0	21.6	50	50
28	PRS-28/F	28.5	23.6	50	50
28	PRS-28/C	28.5	22.5	50	50
34	PRS-34/F	34.5	28.9	60	50
34	PRS-34/C	34.5	28.9	60	50
42	PRS-42	42.5	35.6	65	25
54	PRS-54	54.5	47.9	75	25

PI Light Weight Conduit

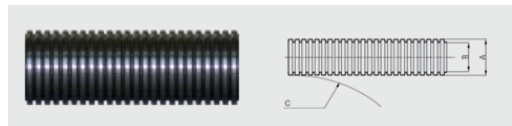

Material: Modified Polyamide 12
 Temperature range: -50°C ~ +120°C , short-term to 150°C
 Properties: Excellent flexibility, fire hazard, halogen free, high UV resistance and high fatigue life, self-extinguishing

Colour: Black(BL)/Grey(GR)
 Protection Degree: IP66, IP68(For use with RL fitting & seal)
 Applications: Machine building, electric equipment, machine tool, mechanical building ,auto equipment, electric control system, rail transportation, shipping facilities etc

Conduit size	Part no.	A (mm) OD	B (mm) ID	C (mm) Min bend radius	Packing (m/roll)
13	PIL-13	13.0	10.2	25	100
16	PIL-16	15.8	12.0	35	50
17	PIL-17	17.0	13.4	35	50
18	PIL-18	18.5	14.7	40	50
21	PIL-21	21.2	17.6	45	50
26	PIL-26	26.0	21.7	50	50
28	PIL-28/F	28.5	23.7	50	50
28	PIL-28/C	28.5	22.6	50	50
34	PIL-34/F	34.5	29.0	60	50
34	PIL-34/C	34.5	29.0	60	50
42	PIL-42	42.5	35.7	65	25
54	PIL-54	54.5	48.0	75	25