

PET expansion sleeve


Material: Flame retardant PET

Temperature range: -50°C~+150°C

Melt point: 240±10°C

Flame- retardant: VW-1

Properties: Excellent flexibility, can be loosely, easy to lead wires, excellent contractility, elasticity and abrasive resistance

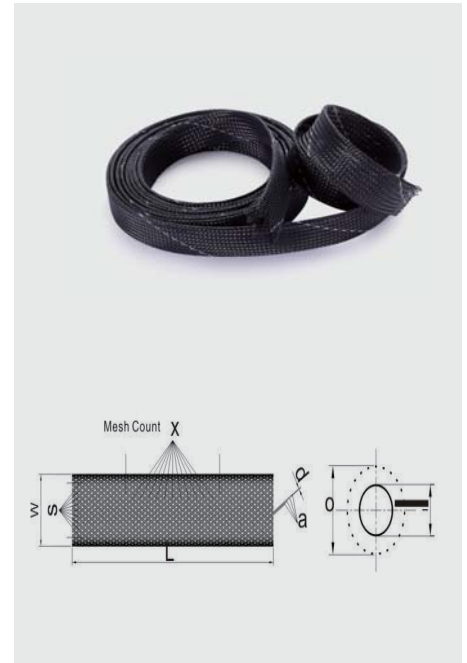

Part no.	Inch	Nominal Size mm	Expanded range		Packing (m/roll)
			Min. (mm)	Max. (mm)	
AD-E03	1/8"	3	1	6	500
AD-E06	1/4"	6	3	9	100
AD-E08	5/16"	8	5	16	100
AD-E10	3/8"	10	7	19	100
AD-E12	1/2"	12	8	24	100
AD-E16	5/8"	16	10	27	100
AD-E19	3/4"	19	14	30	100
AD-E25	1"	25	18	35	100
AD-E32	1 1/4"	32	20	50	100
AD-E38	1 1/2"	38	30	60	100
AD-E45	1 3/4"	45	35	75	100
AD-E50	2"	50	40	80	100
AD-E64	2 1/2"	64	45	105	100
AD-E76	3"	76	64	120	100