

81/82

Polyester high flame-retardant expandable sleeving

Material: Polyester Monofilament


Colour: Black/Grey

Temperature range: -50°C ~ +150°C

Melt point: 240±10°C

Flame-retardant: VW-1

Properties: AD-EF high flame-retardant braided expandable sleeving is manufactured from modified polyester monofilament which is up to the standard UL94-V0 not only provide excellent flame retardant properties but also has durable abrasion resistance.

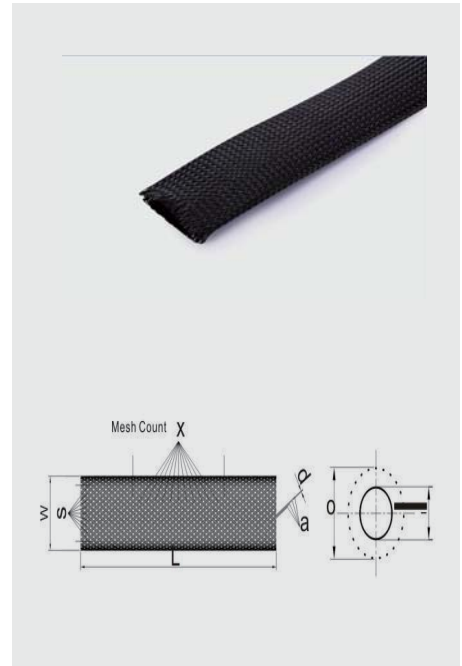

Part no.	Nominal Size		Expanded range		Packing (m/roll)
	Inch	mm	Min. (mm)	Max. (mm)	
AD-EF-03	1/8"	3	1	6	1000
AD-EF-06	1/4"	6	3	9	500
AD-EF-08	5/16"	8	5	13	350
AD-EF-10	3/8"	10	7	16	350
AD-EF-12	1/2"	12	8	21	350
AD-EF-15	5/8"	15	10	25	250
AD-EF-20	3/4"	20	14	30	300
AD-EF-25	1"	25	18	35	200
AD-EF-30	1 1/4"	30	20	50	100
AD-EF-40	1 1/2"	40	25	55	100
AD-EF-45	1 3/4"	45	35	75	100
AD-EF-50	2"	50	40	80	100
AD-EF-64	2 1/2"	64	45	105	100
AD-EF-76	3"	76	64	120	100