

## RLMK Modular wiresplint


RLMK Modular wiresplint should be matched with wiresplint body and wiresplint sheath for applying.

### Wiresplint body

Material: Nylon 6

Colour: Black

Temperature range: -40°C~+105°C

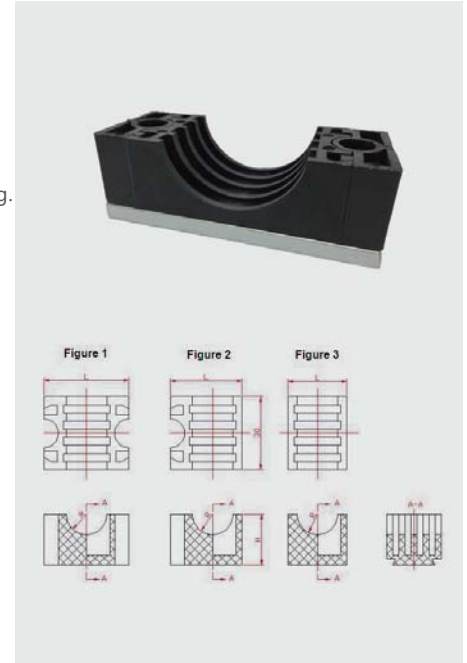

Main body Part no.	Hole distance	L(mm)	H(mm)	R	Applicable cable (mm)	Applicable conduit	Applicable steel conduit diameter (mm)	Shape
RLMK22	47.0	45.0	18.5	R13.5	10-150	PA13-PA21	≤24	Figure1
RLMK221	-	40.5	18.5	R13.5	10-150	PA13-PA21	≤24	Figure2
RLMK222	-	35.0	18.5	R13.5	10-150	PA13-PA21	≤24	Figure3
RLMK13	44.0	41.8	23.0	R10.5	10-50	PA13-PA16	≤16	Figure1
RLMK23	54.0	51.8	23.0	R16.0	10-150	PA13-PA21	≤25	Figure1
RLMK27	58.0	55.8	23.0	R18.5	70-240	PA13-PA28	≤30	Figure1
RLMKA	-	28.0	22.5	R10.0	10-50	PA13-PA16	≤16	Figure3
RLMKA1	-	34.5	22.5	R10.0	10-50	PA13-PA16	≤16	Figure2
RLMKA2	41.0	41.0	22.5	R10.0	10-50	PA13-PA16	≤16	Figure1
RLMKB	-	35.0	22.5	R13.0	50-120	PA13-PA21	≤22	Figure3
RLMKB1	-	41.5	22.5	R13.0	50-120	PA13-PA21	≤22	Figure2
RLMKB2	48.0	48.0	22.5	R13.0	50-120	PA13-PA21	≤22	Figure1
RLMKC	-	36.0	22.5	R16.0	95-185	PA13-PA28	≤28	Figure3
RLMKC1	-	46.5	22.5	R16.0	95-185	PA13-PA28	≤28	Figure2
RLMKC2	53.0	53.0	22.5	R16.0	95-185	PA13-PA28	≤28	Figure1
RLMKD1	-	53.0	24.5	R19.0	95-300	PA13-PA34	≤34	Figure2
RLMKD2	59.5	59.5	24.5	R19.0	95-300	PA13-PA34	≤34	Figure1
RLMKE	81.0	81.0	37.5	R29.0	10-300	PA13-PA54	≤54	Figure1

# 105/106

## RLMK Modular wiresplint

RLMK Modular wiresplint should be matched with wiresplint body and wiresplint sheath for applying.



## Wiresplint sheath

Main body Part no.	Sheath Part no.	Cable sheath diameter	Cable outer diameter range	Applicable conduit size
RLMKA	AHT-10	8.1	7.7-8.5	-
	AHT-16	9.0	9.0-9.8	-
RLMKA1	AHT-25	10.9	10.5-11.3	-
RLMKA2	AHT-50	14.5	13.9-15.2	PA16
	AHT-70	17.0	16.5-17.4	-
RLMKB	BHT-16	9.0	8.0-9.8	-
	BHT-35	12.2	11.8-12.6	-
	BHT-50	14.5	13.9-15.2	PA16
	BHT-70	17.0	16.5-17.4	-
	BHT-95	19.4	18.6-19.8	-
	BHT-120	21.4	21.0-21.8	PA21
RLMKC	CHT-50	14.5	13.9-15.2	PA16
	CHT-70	17.0	16.5-17.4	-
	CHT-95	19.4	18.6-19.8	-
	CHT-120	21.4	21.0-21.8	PA21
	CHT-150	24.0	23.4-24.6	-
RLMKD1	CHT-185	26.1	25.5-26.8	-
	DHT-120	21.4	21.0-21.8	PA21
RLMKD2	DHT-150	23.8	23.4-24.6	-
	DHT-36	36.0 ( for steel, aluminium conduit)	-	-
RLMKE	DHT-φ28.5	28.5	-	PA28
	EHT-240	30.2	29.4-30.6	-
	EHT-φ42.5-1	32.8	32.0-33.4	-
	EHT-φ42.5	42.5	-	PA42
RLMK13	EHT-φ54.5	54.5	-	PA54
	MK13-16	9.4	8.0-9.8	Not applicable for nylon conduits
	MK13-25	10.9	10.5-11.3	
	MK13-35	12.2	11.8-12.6	
MK13-50	14.4	13.9-15.2		
RLMK23	MK23-50	14.4	13.9-15.5	Not applicable for nylon conduits
	MK23-70	17.0	16.5-17.4	
	MK23-95	19.4	18.6-19.8	
	MK23-120	21.4	21.0-1.8	
	MK23-150	24.2	23.4-24.6	
RLMK27	MK27-95	19.4	18.6-19.8	Not applicable for nylon conduits
	MK27-120	21.4	21-21.8	
	MK27-150	24.2	23.4-24.6	
	MK27-185	26.3	25.5-26.8	
	MK27-240	30.2	29.4-30.6	