

# 89/90

## Closed shielding sleeving




Material: Tinned copper filament

Colour: Tinned color

Temperature range: -60°C~+200°C

Properties: AD-PB is woven with tinned copper foil filament. This product has ability of resistant to EMI shielding, and protect wire and cables. Using tinned copper foil filament can improve the intensity, avoid copper oxidation and corrosion. Tin was the appearance of silver, bright color.

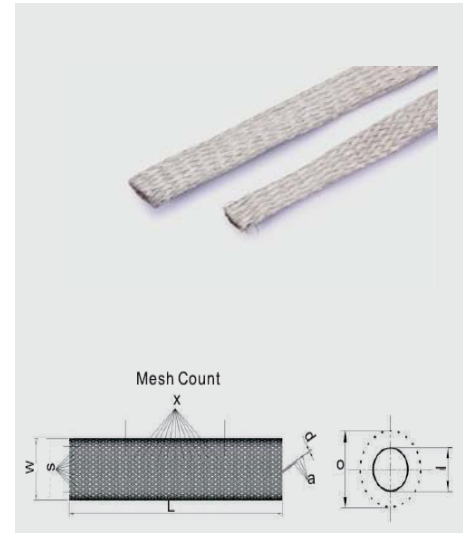

Part no.	Nominal size (mm)	Expanded range (I to O) (mm)	Packing (m/roll)
AD-PB-20	20.0	15.0---25.0	30
AD-PB-25	25.0	25.0---35.0	30
AD-PB-35	35.0	35.0---50.0	30

## Spiral wrap



Material: Polyethylene

Colour: Black/White

Temperature range: -30°C~+90°C

Flame- retardant: UL94-V2

Application: Spiral wrap is an economical way for cable management. It can be easily applied to wire harness, cables and wire bundles keep all your wires tidy and beautiful. Simply fix one end by hand first, then wrapped around the cable in a clockwise direction and tighten it up.



Part no.	Inside diameter I (mm)	Fitted O (mm)	Spread width W (mm)	Bundle diameter range (mm)	Packing (m/roll)
CRG-03	2±0.5	3±0.5	5±1	2~25	50
CRG-04	3±0.6	4±0.5	6±2	3~30	50
CRG-06	5±0.5	6±0.5	8±1	4~50	20
CRG-08	7±0.5	8±0.8	10±1	6~60	12
CRG-10	8.8±0.5	10±0.9	12±1	7.5~60	10
CRG-12	10.5±0.5	12±0.5	14±1	9~65	8
CRG-14	12±0.5	14±0.5	16±1	10~75	5
CRG-16	14±0.5	16±0.5	18±1	12~80	4
CRG-20	18±0.5	20±0.5	22±1	15~100	3
CRG-22	19±0.5	22±0.5	24±1	16~105	3