

平包塑金属软管

Liquid-tight metal conduits

材质：镀锌铁皮（双扣），外 PVC 被覆


颜色：黑色 / 灰色

温度：-25°C~+80°C, 短时间 100°C

防护等级：IP68

特性：超柔軟性与极佳弯曲性能，具有极佳的防水性，绝缘性，抗腐蚀性；表面加 PVC 被覆，具阻燃，抗 UV 抗老化。结构为反扣型增加抗拉强度，不容易折断或变形。

应用：铁路，机车，交通系统工程，空调。各种机床，机械，自动控制设备，发电厂。石油，化工。输电能，通讯系统，基地台架式，船舶，大厦，厂房内及屋外露出部分之配线保护。

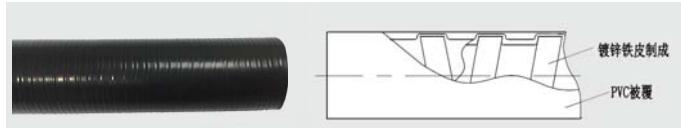

Material: Galvanized steel strip(inter locked), PVC sheath

Colour: Black/Grey

Temperature range: -25°C~+80°C,short-term to 100°C

Protection Degree: IP68

Properties: High flexibility, excellent bend ability. High waterproof, insulated chemical resistance. PVC sheath, fire resistance, uv-resistant, aging resistance. Turn-over locked structure to increase strength resistance, hard to break or distort.

Applications: Railway, vehicle, traffic system project air-condition. Various machine tool and machines. Automatic control equipment, electric power plants. Petroleum, chemical industry, transmission and distribution system, communication system, base station span. Cable protection in ships, buildings and plants.

软管尺寸 Conduit size	型号 Part no.	外径 (mm) OD	内径 (mm) ID	包装 (米 / 卷) Packing
1/4"	SPLC-12	15.0	9.5	50
3/8"	SPLC-16	17.7	12.5	50
1/2"	SPLC-20	21.3	16.1	50
3/4"	SPLC-25	26.7	20.8	40
1"	SPLC-32	33.0	26.0	30
1 1/4"	SPLC-40	42.2	34.0	30
1 1/2"	SPLC-45	47.8	39.0	20
2"	SPLC-57	59.4	51.0	10
2 1/2"	SPLC-70	72.5	63.0	10

不锈钢编织网金属软管

Stainless steel overbraided metal conduits

材质：镀锌铁皮（单扣），外不锈钢编织

颜色：银色

温度：-45°C~+350°C

防护等级：IP40

特性：超柔軟性与极佳弯曲性能，耐高温，防止如铁屑等高温金属落溅物，具电磁屏蔽和防爆。

应用：各种机床，机械，电梯，石油，化工。智能楼宇综合布线、安防系统、室外照明、厂房等建筑之配线保护。



Material: Galvanized steel strip (square locked), stainless steel braided

Colour: Silver

Temperature range: -45°C~+350°C

Protection Degree: IP40

Properties: High flexibility, excellent bend ability. Temperature-resistance, resistant to high temperature chips. Electromagnetic screen, explosion-resistance.

Applications: Various machine tools and machines, elevators, chemical industry. Cable protection in Brainpower buildings threading, security system, exterior illumination, and plants building.

软管尺寸 Conduit size	型号 Part no.	外径 (mm) OD	内径 (mm) ID	包装 (米 / 卷) Packing
1/4"	SBC10	10.1	6.8	25
5/16"	SBC12	14.1	10.3	25
3/8"	SBC16	16.7	12.6	25
1/2"	SBC20	20.8	16.1	25
3/4"	SBC25	25.8	21.1	25
1"	SBC32	31.8	26.8	10
1 1/4"	SBC40	41.4	35.4	10
1 1/2"	SBC45	46.1	40.3	10
2"	SBC57	57.8	51.6	5