

PET 伸缩套管

PET expansion sleeve

材质：环保阻燃 PET 丝

Material: Flame retardant PET

温度：-50°C~+150°C

Temperature range: -50°C~+150°C

熔点：240±10°C


Melt point: 240±10°C

阻燃等级：VW-1

Flame-retardant: VW-1

特性：柔软度极佳，易于弯曲，可松可紧，易于引线操作，良好的伸缩性，弹性及耐磨性

Properties: Excellent flexibility, can be loosely, easy to lead wires, excellent contractility, elasticity and abrasive resistance

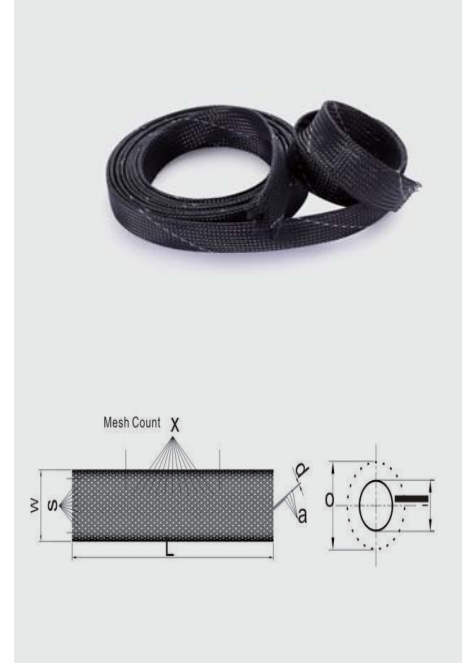

型号 Part no.	折径 (W) (Inch)	Nominal Size (mm)	扩充范围 Expanded range		包装 (米 / 卷) Packing
			最小 . Min. (mm)	最大 . Max. (mm)	
AD-E03	1/8"	3	1	6	500
AD-E06	1/4"	6	3	9	100
AD-E08	5/16"	8	5	12	100
AD-E10	3/8"	10	7	17	100
AD-E12	1/2"	12	8	20	100
AD-E16	5/8"	16	10	27	100
AD-E19	3/4"	19	14	30	100
AD-E25	1"	25	18	33	100
AD-E32	1 1/4"	32	20	50	100
AD-E38	1 1/2"	38	30	60	100
AD-E45	1 3/4"	45	35	75	100
AD-E50	2"	50	40	80	100
AD-E64	2 1/2"	64	45	105	100
AD-E76	3"	76	64	120	100