

PET 高阻燃网管 Polyester high flame-retardant expandable sleeving

材质：聚酯

Material: Polyester Monofilament

颜色：黑色 / 灰色

Colour: Black/Grey

温度：-50°C~+150°C

Temperature range: -50°C~+150°C

熔点：240±10°C


Melt point: 240±10°C

阻燃等级：VW-1

Flame-retardant: VW-1

特性：高阻燃编织网管 (AD-EF) 采用由能达到 UL94-V0 的聚酯 PET 单丝编织而成，具有良好的伸缩性、耐磨性和阻燃性，此网管最大的特色是其阻燃等级可以达到 V0。

Properties: AD-EF high flame-retardant braided expandable sleeving is manufactured from modified polyester monofilament which is up to the standard UL94-V0 not only provide excellent flame retardant properties but also has durable abrasion resistance.

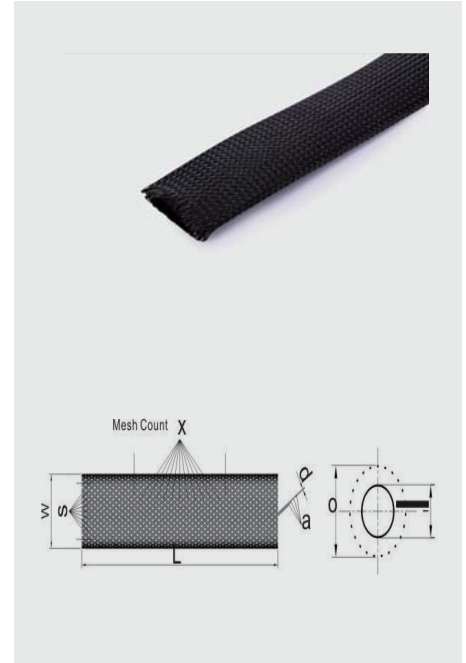

型号 Part no.	折径 (W) (Inch)	Nominal Size (mm)	扩充范围 Expanded range		包装 (米 / 卷) Packing
			最小 . Min. (mm)	最大 . Max. (mm)	
AD-EF-03	1/8"	3	1	6	1000
AD-EF-06	1/4"	6	3	9	500
AD-EF-08	5/16"	8	5	13	350
AD-EF-10	3/8"	10	7	16	350
AD-EF-12	1/2"	12	8	21	350
AD-EF-15	5/8"	15	10	25	250
AD-EF-20	3/4"	20	14	30	300
AD-EF-25	1"	25	18	35	200
AD-EF-30	1 1/4"	30	20	50	100
AD-EF-40	1 1/2"	40	25	55	100
AD-EF-45	1 3/4"	45	35	75	100
AD-EF-50	2"	50	40	80	100
AD-EF-64	2 1/2"	64	45	105	100
AD-EF-76	3"	76	64	120	100