

自卷式屏蔽套管

Self-closing shielding sleeving

材质：聚酯 + 镀锌铜

Material: Polyester + Tinned copper

温度：-50°C~+125°C


Temperature range: -50°C~+125°C

熔点：240°C±10°C

Melt point: 240°C±10°C

特性：柔软，轻便，卓越的屏蔽性，开口设计便于安装检修

Properties: Excellent EMI shielding, protection, lightweight and flexible, while its open design allows it to be installed on completed assemblies.

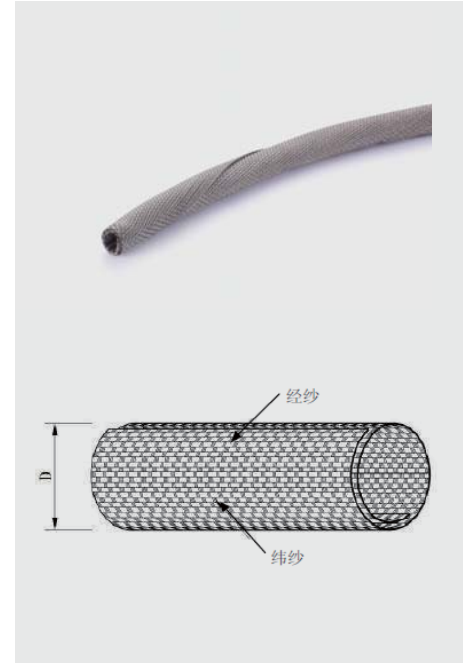

| 型号 Part no. | 直径 (mm) Dia size | 展开宽度最大 O (mm) Expanded range | 包装 (米 / 卷) Packing |
|----------------|---------------------|---------------------------------|-----------------------|
| AD-SB-005 | 5.0 | 6.0 | 100 |
| AD-SB-008 | 8.0 | 9.0 | 100 |
| AD-SB-010 | 10.0 | 11.0 | 100 |
| AD-SB-013 | 13.0 | 14.0 | 50 |
| AD-SB-016 | 16.0 | 17.0 | 25 |
| AD-SB-019 | 19.0 | 20.0 | 25 |
| AD-SB-025 | 25.0 | 27.0 | 25 |
| AD-SB-029 | 29.0 | 31.0 | 25 |
| AD-SB-032 | 32.0 | 34.0 | 25 |
| AD-SB-038 | 38.0 | 40.0 | 25 |