

魔术贴屏蔽套管 Velcro shielding wrap



材质：聚酯

Material: Polyester

颜色：黑色

Colour: Black

温度：-50°C~+150°C


Temperature range: -50°C~+150°C

熔点：240±10°C

Melt point: 240±10°C

特性：采用镀锡铜钩织网、阻燃布和魔术贴复合而成。本产品具有屏蔽高灵敏的电磁干扰、降噪、防尘、漏电保护作用。

Properties: AD-T Velcro multifilament wrap is a non-expandable sleeving woven from polyester multifilament yarn. It has lightweight, high strength, excellent flame and abrasion resistance. The product can be easily wrapped and closed over the cable bundle. It can be re-opening rapidly to permit cables to be added or removed, and breakouts can be made simply by bringing cables out through Velcro.

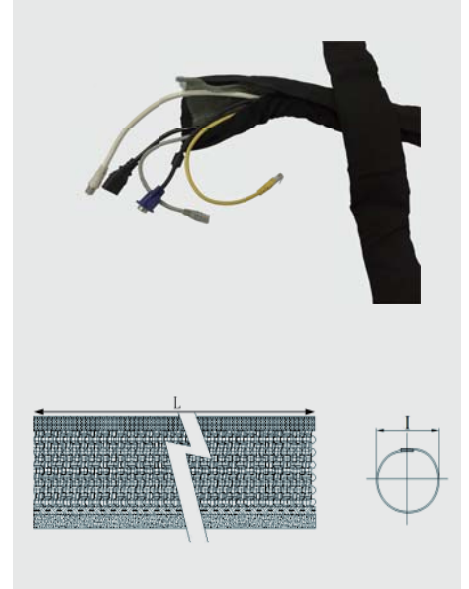

型号 Part no.	内径 I.D.(mm) Inside diameter	适用外径 O.D.(mm) Fitted	包装 (米 / 卷) Packing
AD-T-16	16	10-16	25
AD-T-20	20	17-20	25
AD-T-30	30	21-30	25
AD-T-50	50	31-50	25

拉链屏蔽套管 Zipper shielding wrap



材质：聚酯

Material: Polyester

颜色：黑色

Colour: Black

温度：-50°C~+150°C


Temperature range: -50°C~+150°C

熔点：240±10°C

Melt point: 240±10°C

特性：采用镀锡铜钩织网、阻燃布和拉链复合而成。本产品具有屏蔽高灵敏的电磁干扰，同时能起到降噪、防尘、阻燃、耐磨性能。此外，产品本身带有拉链，易于安装和拆卸，便于使用。

Properties: AD-L is manufactured from copper hook weaving, flame retardant fabric and zipper which provide shielding of high sensitivity EMI shielding, reduce noise, dustproof, flame retardant and abrasive resistance.

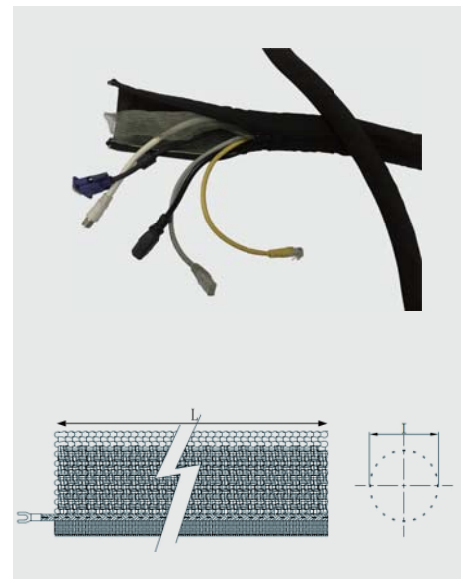

型号 Part no.	内径 I.D.(mm) Inside diameter	适用外径 O.D.(mm) Fitted	包装 (米 / 卷) Packing
AD-L16	16	10-16	按客户的 要求进行 包装
AD-L20	20	17-20	
AD-L30	30	21-30	
AD-L50	50	31-50	