


## 闭口屏蔽套管 Closed shielding sleeving



材质：镀锡铜丝  
Material: Tinned copper filament  
颜色：镀锡色  
Colour: Tinned color  
温度：-60°C~+200°C  
Temperature range:-60°C~+200°C

特性：镀锡铜网管由镀锡铜丝精编而成，该产品具有电磁信号屏蔽、抗电磁干扰、保护电线电缆的作用。使用镀锡铜可提高强度，避免铜氧化及腐蚀。镀锡外观呈银灰色，色泽鲜亮。  
Properties: AD-PB is woven with tinned copper foil filament. This product has ability of resistant to EMI shielding, and protect wire and cables. Using tinned copper foil filament can improve the intensity, avoid copper oxidation and corrosion. Tin was the appearance of silver, bright color.

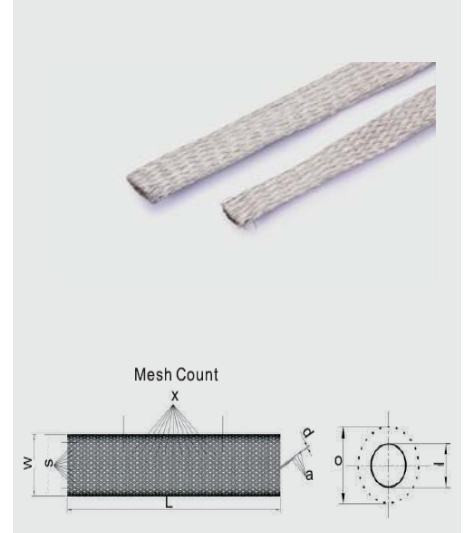

型号 Part no.	折径 (mm) Nominal size	展开宽度最小 (I) 到最大 (O)(mm) Expanded range(I to O)	包装 (米 / 卷) Packing
AD-PB-20	20.0	15.0---25.0	30
AD-PB-25	25.0	25.0---35.0	30
AD-PB-35	35.0	35.0---50.0	30

## 缠绕管 Spiral wrap



材质：聚乙烯  
Material: Polyethylene  
颜色：黑色 / 白色  
Colour: Black/White  
温度：-30°C~+90°C  
Temperature range: --30°C~+90°C  
阻燃等级：UL94-V2  
Flame- retardant: UL94-V2

应用：可以用于包装电线和线束，使之整齐美观。同时能保护电线不受损害。使用时先将一端固定然后按顺时针方向将管子缠绕在电线上，最后扎紧即可。  
Application: Spiral wrap is an economical way for cable management. It can be easily applied to wire harness, cables and wire bundles keep all your wires tidy and beautiful. Simply fix one end by hand first, then wrapped around the cable in a clockwise direction and tighten it up.



型号 Part no.	内径 I (mm) Inside diameter	外径 O (mm) Fitted	带宽 W(mm) Spread width	壁厚 (mm) Wall thickness	包装 (米 / 卷) Packing
CRG-04	2±0.5	4±0.5	8±1	1.0±0.1	100
CRG-05	3±0.6	5±0.5	8±1	1.0±0.1	100
CRG-07	5±0.5	7±0.5	10±1	1.0±0.1	100
CRG-08	6±0.5	8±0.5	12±1	1.0±0.1	100
CRG-09	7±0.5	9±0.5	12±1	1.0±0.1	100
CRG-10	8±0.5	10±0.5	14±1	1.0±0.1	100
CRG-11	9±0.5	11±0.5	16±1	1.0±0.1	50
CRG-12	10±0.5	12±0.5	18±1	1.0±0.1	50