

95/96

轻质纱屏蔽套管 Copper foil shielding sleeving

材质：轻质纱

Material: Copper filament

颜色：镀锡色


Colour: Tinned color

温度：-40°C~+150°C

Temperature range: -40°C~+150°C

特性：轻质纱屏蔽套管（AD-TB）由轻质纱精心编制而成，常用于工业和电子领域。该产品具有电磁信号屏蔽、重量轻、柔软性好等优点，相比镀锡铜编织网管，此产品能减轻成品的总重量。

Properties: AD-TB is woven with copper foil filament, it is used for various electrical and industrial fields where EMI shielding, excellent protection and lightweight are required. It is lighter and more flexible than tinned copper braided sleeving, it is a perfect combination of economy and durability, it can be used as connectors with highly flexible and easily to install.

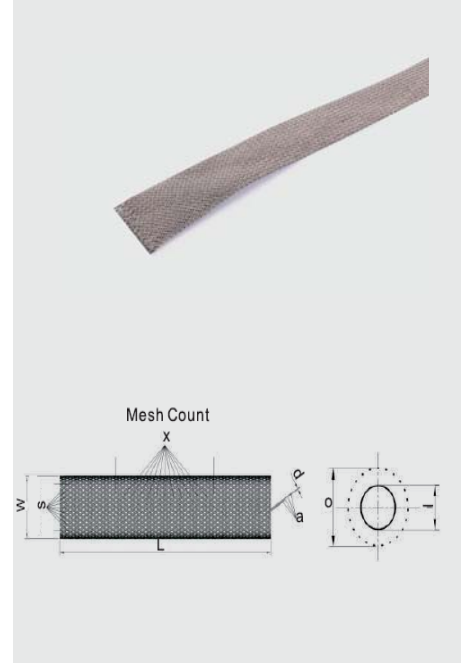

型号 Part no.	折径 (mm) Nominal size	展开宽度最小 (I) 到最大 (O)(mm) Expanded range(I to O)	包装 (米 / 卷) Packing
AD-TB-04	4.0	3.0---7.0	300
AD-TB-06	6.0	4.0---9.0	200
AD-TB-08	8.0	6.0---12.0	200
AD-TB-10	10.0	7.0---16.0	150
AD-TB-12	12.0	8.0---20.0	100
AD-TB-15	15.0	10.0---23.0	100
AD-TB-20	20.0	13.0---28.0	100
AD-TB-25	25.0	18.0---32.0	100
AD-TB-30	30.0	20.0---40.0	50
AD-TB-40	40.0	30.0---50.0	50
AD-TB-50	50.0	40.0---60.0	50